

SOLENOID PUMP ME3 CHLORINE

Data
Sheet


DESCRIPTION

- ✓ Solenoid dosing pump with built in chlorine controller
- ✓ 3 different working mode: **constant, ON/OFF, proportional**
- ✓ 4 different languages menu: **Italian, French, Spanish and English**
- ✓ Built-in Overdose alarm
- ✓ Starting time delay setting
- ✓ Backlit digital display 8x2
- ✓ Status and programming led
- ✓ Reinforced PP body
- ✓ Instant flow rate showed in %
- ✓ 100% Made in Italy
- ✓ CE approved
- ✓ Standard Power Supply 230 Vac
- ✓ ON/OFF switch



OPTIONAL

- ✓ PVDF pump head with PTFE seals (suitable to dose High Concentration Sodium Hypochlorite or strong Oxidizing agents)
- ✓ Level probe input
- ✓ Flow switch input

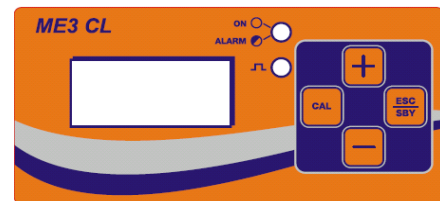

DESCRIPTION		
Standard Version	Standard Material	Upon Request
Pump Head	PP 1/2" fitting	PVDF 1/2" fitting
High Flow Rate model		
Pump Head	PP 1/2" fitting	PVDF 1/2" fitting
High Pressure model		
Pump Head	PP 1/2" fitting	PVDF 1/2" fitting
Balls	Pyrex	Ceramic, PTFE, AISI 316
Diaphragm	PTFE	-----
Fittings	PP	PVDF
Seals	Viton®	EPDM
Valve Body	PP 4 x 6	PVDF 4 x 6
Foot Filter	PP 4 x 6 lip valve	PP4 x 6 ball valve
Injection Valve	PP4 x 6 ball valve	PP4 x 6 ball valve
Suction Tube	PVC 4 x 6	PVDF 4 x 6
Delivery Tube	PE 4 x 6	PVDF 4 x 6


Specifications subject to change without notice

Via Maestri del Lavoro,5 - 02100 Vazia (RI) - ITALY Tel.:+ 39(0)746-229064; Fax:+ 39(0)746-221224
e-mail: info@microdos.it ; Web site: www.microdos.it

SOLENOID PUMP ME3 CHLORINE

Data
Sheet

ME3 TECHNICAL SPECIFICATIONS											
Standard	Max l/h	Pressure		Max cc / imp	Stroke	Solenoid	Pump Head	Power [Watt]	Pulses	Weight	
		Bar	PSI							kg.	Lbs
10-02	10	02	29,4	1,11	1,3	Ø 80	PP	60	150	3,5	6,7
05-10	05	10	145	0,55	1,1	Ø 80	PP	60	150	3,5	6,7
04-12	04	12	176	0,44	0,9	Ø 80	PP	60	150	3,5	6,7
High Flow rate											
24-01	24	01	15	3,34	2,2	Ø 90	PP	60	150	4,0	8,8
22-02	22	02	29	2,89	2,2	Ø 90	PP	60	150	4,0	8,8
High Pressure											
06-15	06	15	218	0,67	1,4	Ø 90	PP	60	150	4,0	8,8
04-18	04	18	261	0,44	1,4	Ø 90	PP	60	150	4,0	8,8

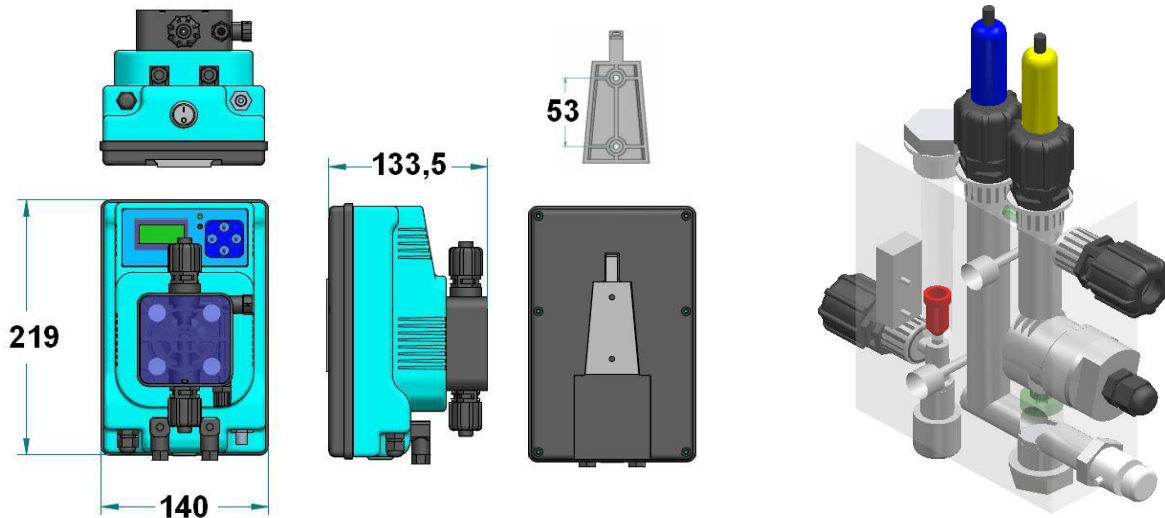

DIMENSIONS

0-5 mg/l measurement range; plexiglass body, flow switch sensor, copper/platinum electrode

AMPEROMETRIC PROBE PRO-CG-CL3

Chlorine probes to work correctly must be fed with a constant flow of water between 30 and 50 l / h. Must be used with PRO-HCG-CL3 flow trough probe holder

ACCESSORIES KIT					
	Injection valve	PP Foot filter with lip valve	PE 4x6 Delivery tube	2mt PVC 4x6 Suction tube	1,5mt PVC 4x6 Bleed tube
STANDARD KIT					

Specifications subject to change without notice

Via Maestri del Lavoro,5 - 02100 Vazia (RI) - ITALY Tel.:+ 39(0)746-229064; Fax:+ 39(0)746-221224
e-mail: info@microdos.it ; Web site: www.microdos.it

Specifications subject to change without notice

Via Maestri del Lavoro,5 - 02100 Vazia (RI) – ITALY Tel.:+ 39(0)746-229064; Fax:+ 39(0)746-221224
e-mail: info@microdos.it ; Web site: www.microdos.it