

# PANEL

## MP-DUAL PH - CHLORINE

Data  
Sheet


### DESCRIPTION

- ✓ IP 65 wired thermo-moulded panel
- ✓ MP DUAL ph/Chlorine dosing system with built in controller. Real time on screen display of water values up to two decimals (PPM for Chlorine) plus temperature
- ✓ Backlit display
- ✓ 50 micron washable cartridge filter with probe holder
- ✓ 4 x 6 or 8 x 12 water inlet
- ✓ Flow switch
- ✓ Overdose alarm
- ✓ Start up delay
- ✓ Password protected
- ✓ pH Stability mode for a perfect water sanitization
- ✓ Flow rate display in %
- ✓ 3 functioning modes: constant, ON / OFF, proportional
- ✓ Four languages menu: ITALIANO, INGLESE, FRANCESE, SPAGNOLO
- ✓ Alarm relay( free contact )
- ✓ Default parameter restore option
- ✓ STAND\_BY function
- ✓ Over/under range signal



### OPTIONAL

- ✓ Flow switch
- ✓ Level switch
- ✓ Temperature probe

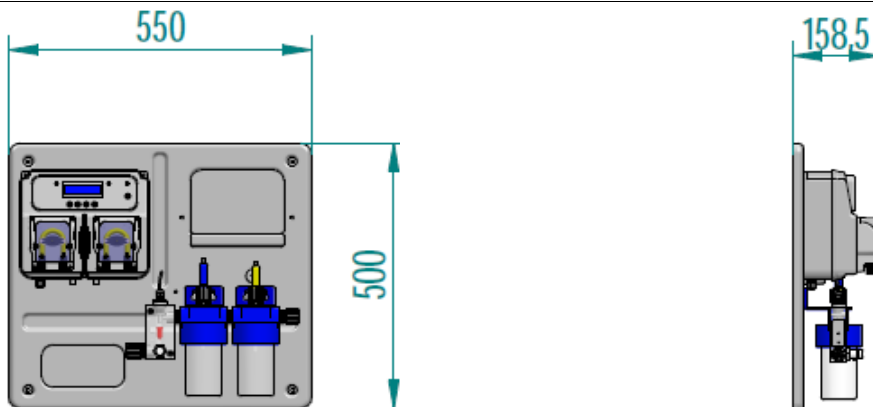

Specifications subjected to change without notice

Via Maestri del Lavoro,5 - 02100 Vazia (RI) - ITALY Tel.:+ 39(0)746-229064; Fax:+ 39(0)746-221224  
e-mail: info@microdos.it ; Web site: www.microdos.it

# PANEL

## MP-DUAL PH - CHLORINE

Data  
Sheet

DESCRIPTION		
	Standard configuration	Upon request
Case	PP reinforced with fiberglass	-----
Rullers	DELRIN	-----
Tube	Santoprene	-----
Consumption	8 Watts	-----
Nuts	PP M10	-----
Fittings	PP tubo 4 x 6	-----
Probe connection	BNC	-----
Foot filter	Lip Valve	-----
Suction tube	PVC 4 x 6	PVDF
Delivery tube	PE 4 x 6	PVDF

TECHNICAL SPECIFICATIONS										
Standard	Max lt/h	pressure		Max cc / min	Tube Santoprene	Case	Watt	RPM	weight	
		Bar	PSI						kg.	Lbs
1,5-01	1,5	01	14,7	25	5,8 x 9,3	PP	8	10	1,8	3,31
03-01	03	01	14,7	50	5,8 x 9,3	PP	8	20	1,8	3,31
06-01	06	01	14,7	100	5,8 x 9,3	PP	8	40	1,8	3,31

STANDARD PROBES							
	PH				Chlorine		
CHARACTERISTICS	PRO-PH	PRO-G-PH	PRO-P-PH	PRO-H-PH			
Full Scale	0 ÷ 14	0 ÷ 14	0 ÷ 14	0 ÷ 14	Full Scale		0 ÷ 10
Resolution	0,01	0,01	0,01	0,01	Resolution		0,01
Flow rate	40 lt / h	40 lt / h	40 lt / h	40 lt / h	Flow rate		30-40 lt / h
Body	epoxy	glass	epoxy	glass	Cable		1,5 mt.
Electrode	platinum	platinum	platinum	platinum	Temperature		5-50°C
Temperature	60°C	80°C	50°C	130°C	Electrode		Copper/Platinum
Connection	BNC	BNC	BNC	BNC			
Cable lenght	1 mt	1 mt	1 mt	1 mt			
Back Pressure	2 bar	2 bar	2 bar	6 bar			

Specifications subjected to change without notice

Via Maestri del Lavoro,5 - 02100 Vazia (RI) - ITALY Tel.:+ 39(0)746-229064; Fax:+ 39(0)746-221224  
e-mail: info@microdos.it ; Web site: www.microdos.it