

# PERISTALTIC PUMP

## MP1-TIMER

Data  
Sheet

### DESCRIPTION

- ✓ Peristaltic pump with digital timer
- ✓ 17 start/stop daily programs
- ✓ Suitable for dosing flocculants, enzymes or anti-algae
- ✓ Easy to install and minimum maintenance required
- ✓ Reinforced PP body
- ✓ Polycarbonate front panel
- ✓ PBT roll holder with 2 rolls
- ✓ IP 55 Protection Degree
- ✓ Standard Power Supply 230 Vac
- ✓ ON / OFF switch
- ✓ 100% Made in Italy
- ✓ CE approved



### OPTIONAL

- ✓ SCHUKO plug

### DESCRIPTION

#### Configurazione standard


Pump Body	Polypropylene
Roller	DELRIN
Tube	Santoprene
Power supply	230 Vac 50 – 60 Hz
Consumption	8 Watt
Weight	1,0 kg
Fittings	PP ring nuts for tube 4 x 6 mm
Injection valve / Foot filter	Lip valve (PP + VT)
Suction tube	PVC 4 x 6
Delivery tube	PE 4 x 6

# PERISTALTIC PUMP MP1-TIMER

Data  
Sheet

## TECHNICAL SPECIFICATIONS

Standard	Flow rate		Pressure		Tube material	Tube measures [mm]	RPM
	[l/h]	[cc/min]	[Bar]	[PSI]			
0,2 - 01	0,2	3,33	1	14,5	Santoprene	4 x 7	5
0,6 - 01	0,6	10	1	14,5	Santoprene	4 x 7	10
1,2 - 01	1,2	20	1	14,5	Santoprene	4 x 7	18
1,8 - 01	1,8	30	1	14,5	Santoprene	4 x 7	30
2,4 - 01	2,4	40	1	14,5	Santoprene	4 x 7	42

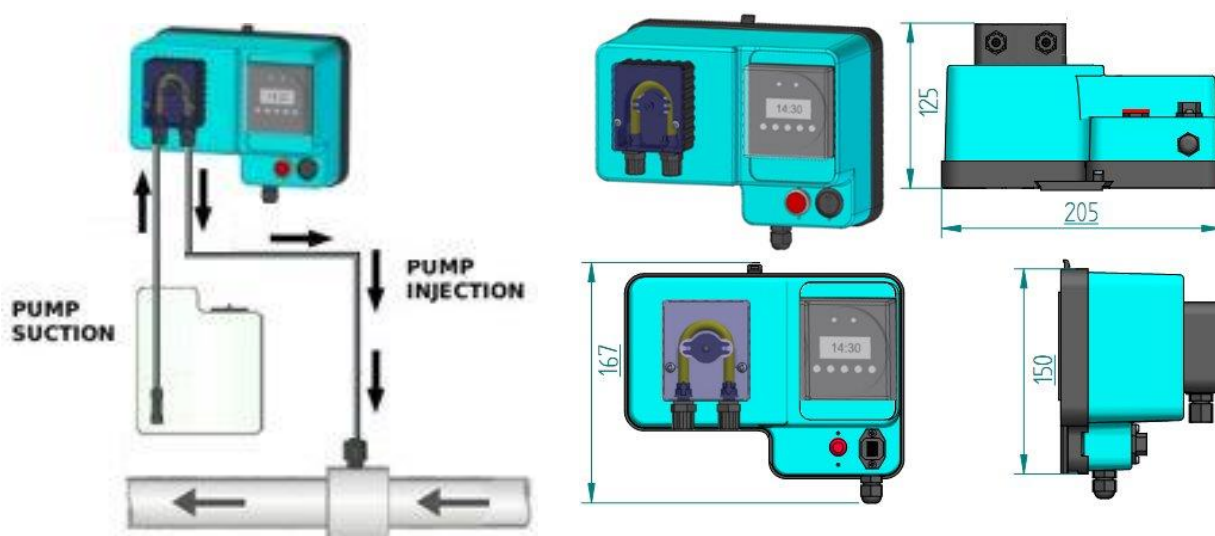

## ACCESSORIES KIT

	Nr.1 Injection Valve 1/2" PP-VL-VT lip valve	Nr.1 Foot filter 1/2" PP-VL-VT lip valve	Nr.1 2mt PE 4x6 delivery tube	Nr.1 2mt PVC 4x6 suction tube
<b>STANDARD KIT</b>	